

MICROLITAQUA

Multi-functional Electronic Micropipette



Unique Features of Multi-functional AQUA Electronic Single Channel and Multi Channel Micropipette (8-Channel and 12-Channel)



EXTERNAL DETACHABLE RECHARGEABLE BATTERY

Ensures continuous usage and eliminates downtime during critical experiments with reliable power backup.




STAINLESS STEEL TIP CONE

The 304 Grade SS tip cone offers high dimensional accuracy resulting in best tip fitment.




SPEED SELECTION MODE

Users can select and adjust the pipetting speed from three options of Low (L), Medium (M) and High (H).



INTERNAL STORAGE MEMORY

Users can store up to six programs in memory and reuse them as per their convenience.



LINEAR STEPPER MOTOR SYSTEM

Motor controlled piston operation ensures no human error and guarantees reliable pipetting.



COMFORTABLE GRASPING WITH ERGONOMIC DESIGN

This design ensures that users can comfortably hold device resulting in minimal strain and effort.



LARGE EASY-TO-READ DISPLAY

1-inch tempered LCD glass adds a layer of protection against accidental impacts, scratches and chemical spills.



VOLUME ADJUSTMENT WHEEL

It offers extremely fast volume setting, menu navigation and enables single-handed operation.



12 UNIQUE MODES OF OPERATIONS

Extensive range of pipetting modes eases workflow, gives the option to tailor protocols and define custom programs.



SOFT KEYS FOR PROGRAMMING

Improves user experience and enables customised and efficient micropipetting workflows.

Specifications and Ordering Information Chart of AQUA Electronic Single Channel and Multi Channel Micropipette


SPECIFICATIONS AND ORDERING INFORMATION CHART OF SINGLE CHANNEL MICROPIPETTE	MODEL	VOLUME RANGE	INCREMENT	VOLUME (µl)	ACCURACY		CV	
					+/-%	+/-µl	+/-%	+/-µl
	AQS-3	0.1-3µl	0.05µl	0.3	10.00	0.030	6.00	0.018
				1.5	2.40	0.036	1.60	0.024
				3	1.30	0.039	0.80	0.024
	AQS-10	0.2-10µl	0.1µl	1	2.50	0.025	1.50	0.015
				5	1.50	0.075	0.70	0.035
				10	1.00	0.100	0.40	0.04
	AQS-20	0.5-20µl	0.1µl	2	7.50	0.15	2.00	0.04
				10	7.50	0.75	0.50	0.05
20				1.00	0.20	0.30	0.06	
AQS-100	2-100µl	0.5µl	10	2.00	0.20	1.00	0.10	
			50	0.80	0.40	0.30	0.15	
			100	0.60	0.60	0.15	0.15	
AQS-200	5-200µl	0.5µl	20	2.50	0.50	1.00	0.20	
			100	0.80	0.80	0.25	0.25	
			200	0.75	1.50	0.20	0.40	
AQS-300	10-300µl	1µl	30	2.50	0.75	0.80	0.24	
			150	0.70	1.05	0.20	0.30	
			300	0.40	1.20	0.15	0.45	
AQS-500	10-500µl	2µl	50	1.60	0.80	0.70	0.35	
			250	0.48	1.20	0.24	0.60	
			500	0.40	2.00	0.16	0.80	
AQS-1000	50-1000µl	1µl	100	2.00	2.00	0.60	0.60	
			500	0.50	2.50	0.20	1.00	
			1000	0.40	4.00	0.15	1.50	
AQS-5000	0.1-5ml	10µl	500	1.00	5.00	0.50	2.50	
			2500	0.50	12.50	0.20	5.00	
			5000	0.60	30.00	0.20	10.00	
AQS-10000	1-10ml	100µl	1000	5.00	50.00	0.60	6.00	
			5000	1.00	50.00	0.20	10.00	
			10000	0.60	60.00	0.16	16.00	

SPECIFICATIONS AND ORDERING INFORMATION CHART OF MULTI CHANNEL MICROPIPETTE (8-CHANNEL AND 12-CHANNEL)	MODEL	VOLUME RANGE	INCREMENT	VOLUME (µl)	ACCURACY		CV		
					+/-%	+/-µl	+/-%	+/-µl	
	8 CHANNELS								
	AQE-10	0.2-10µl	0.1µl	1	2.50	0.025	1.50	0.015	
				5	1.20	0.060	0.40	0.020	
				10	0.80	0.080	0.025	0.0025	
	AQE-100	5-100µl	1µl	10	0.20	0.020	1.00	0.100	
				50	0.40	0.200	0.24	0.120	
				100	0.50	0.500	0.15	0.150	
	AQE-300	10-300µl	1µl	30	0.75	0.225	0.80	0.240	
150				1.05	1.575	0.20	0.300		
300				1.20	3.600	0.15	0.450		
AQE-1000	50-1000µl	1µl	100	2.00	2.000	0.60	0.600		
			500	2.50	12.500	0.20	1.000		
			1000	4.00	40.000	0.15	1.500		
12 CHANNELS									
AQT-10	0.2-10µl	0.1µl	1	2.50	0.025	1.50	0.015		
			5	1.20	0.060	0.40	0.020		
			10	0.80	0.080	0.025	0.0025		
AQT-100	5-100µl	1µl	10	0.20	0.020	1.00	0.100		
			50	0.40	0.200	0.24	0.120		
			100	0.50	0.500	0.15	0.150		
AQT-300	10-300µl	1µl	30	0.75	0.225	0.80	0.240		
			150	1.05	1.575	0.20	0.300		
			300	1.20	3.600	0.15	0.450		
AQT-1000	50-1000µl	1µl	100	2.00	2.000	0.60	0.600		
			500	2.50	12.500	0.20	1.000		
			1000	4.00	40.000	0.15	1.500		

The error limits (Accuracy and Coefficient of Variation) mentioned above are in accordance with DIN EN ISO 8655-2 and are based on the nominal capacity indicated on the instrument. MICROLIT AQUA is calibrated in an ISO 17025 accredited laboratory according to ISO 8655 standards and a Calibration Certificate is included in the product package.

To meet various pipetting demands, the main pipetting program types are suitable for ordinary, volatile, easy-foaming, high-viscosity and other liquids.

Program Types and Advanced Techniques of Pipetting **POSSIBLE WITH** AQUA Multi-functional Electronic Micropipette

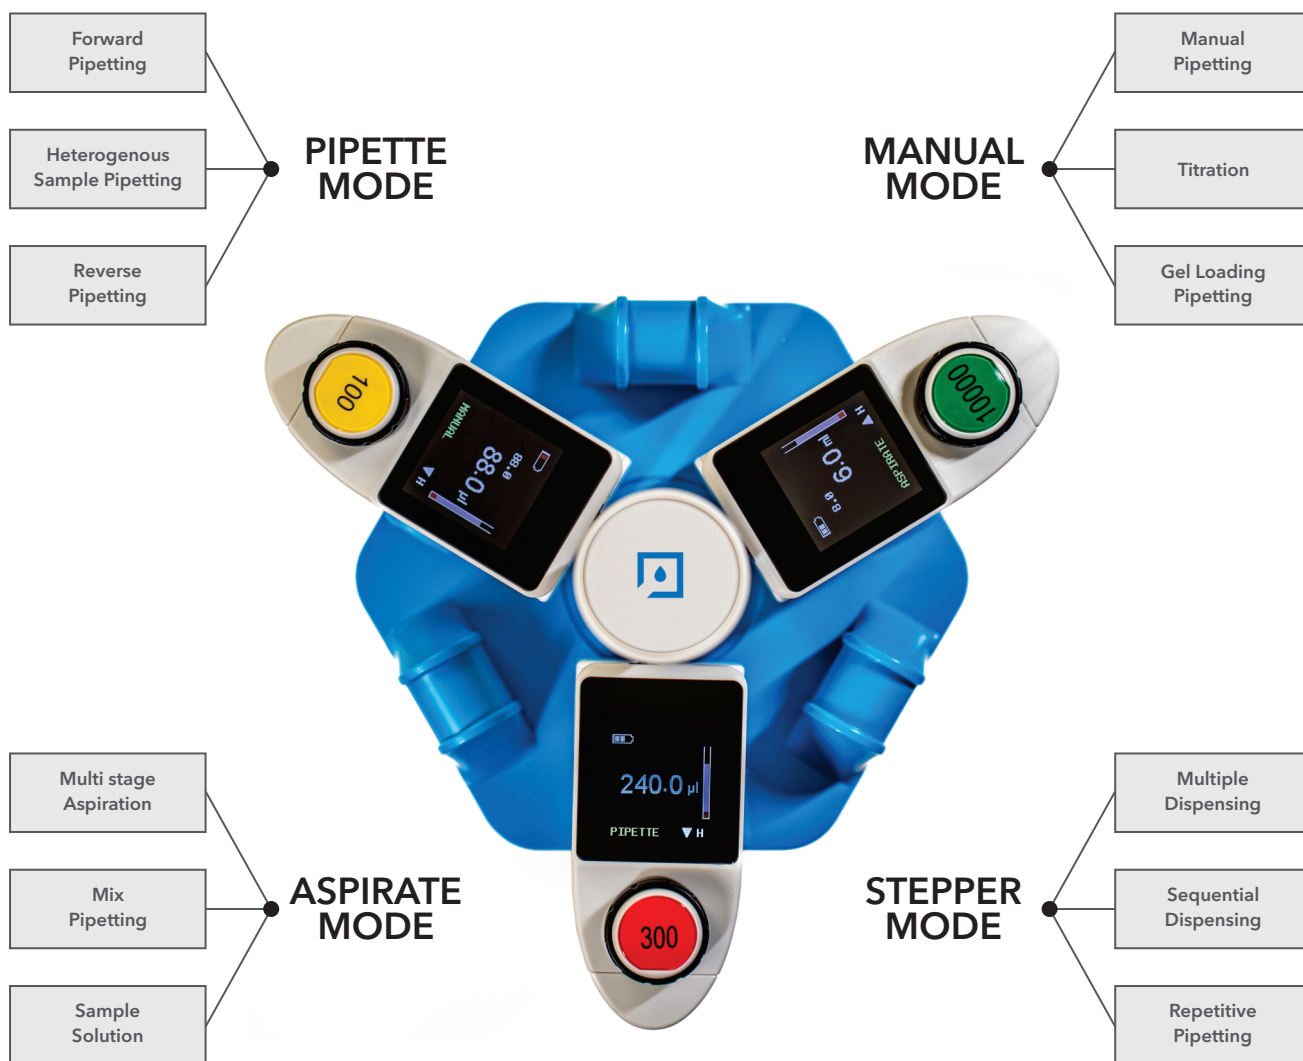

COLOUR CODING FOR EASY IDENTIFICATION



The precision and accuracy of our liquid handling instruments is twice better than industry standards*

*ISO 8655 is the globally accepted industry standard for piston-operated volumetric apparatus. The evaluation was performed by trained and certified personnel at an ISO17025 accredited lab.

State-of-the-Art Design for Achieving High Precision and Accuracy in Laboratory and a Complete Solution for all Pipetting Needs

MICROLIT AQUA is a multi-functional electronic volumetric micropipette designed to measure and transfer liquids precisely and safely. It can measure and transfer volumes from 0.1 µL to 10000 µL depending on various models. It is available in Single Channel and Multichannel (8-channel and 12-channel) variants.

The AQUA electronic micropipettes are exceptionally compact and lightweight due to a knock-down (detachable) rechargeable battery and have multiple pipetting modes to enable efficient lab work. They ensure reliable, accurate and repeatable experiment results and protect the user from repetitive strain injury (RSI). These instruments are designed with ergonomics and intuitive handling in mind and facilitate remarkable user experience in practical laboratory environments.

Assured Quality with ISO 8655 Conformed Calibration

MICROLIT AQUA is calibrated in an ISO 17025 accredited laboratory according to ISO 8655 standards.

A calibration certificate is included with each instrument.

The micropipette is designed with easy user calibration method and can be easily recalibrated in minimum steps.

OTHER IMPORTANT TECHNICAL SPECIFICATIONS	
External Detachable Battery	4.2V Li-ion Battery
Rechargeable Battery Capacity	800 mAh
Rechargeable Battery charging time	Approx 2 hours
Duration of Operations	8 hrs of operation with fully charged battery
Charger	Type A and Type C
Volume Range	Single Ch: 0.1-10000 µl
	8-Ch and 12-Ch: 0.2-1000 µl
Pipetting Modes and Operations	12
Motor	Linear stepping electronic piston control
Memory	Saves upto 6 programs at a time
Tip Compatibility	Universal Tipcone
Tip Ejection	Manual
Autoclavable lower parts	121° C, 20 mins, 1 bar
Sterilization	Whole device can be sterilized by UV light
Carousel Stands	Available separately
Mini USB Interface	Yes

Our Product Excellence



Our products reflect the design philosophy of our organization, combining the best performance parameters with the best user experience

We were honoured by CII Industrial Innovation Awards and adjudged a place in the top 50 Most Innovative Companies of 2022.

We are also accredited by a number of global organizations and have earned worldwide credibility.



OUR REACH



YOUR SATISFACTION IS OUR PRIORITY

Microlit products follow GMP norms and are manufactured under comprehensive QA (Quality Assurance) & QC (Quality Control). Our products reflect the design philosophy of our organisation combining the best performance parameters with the best user experience. However, if you are dissatisfied with the operation of any of our products, get in touch with us or call your nearest Microlit dealer for free replacement.

CONTACT US

★ **Microlit INDIA**

629 Pakramau, Kursi Road, Lucknow 226026, India
Phone: +91 9918625629, Email: info@microlit.com
www.microlit.com

★ **Microlit USA**

33 Wood Avenue South, Suite 600, Iselin, NJ 08830, USA
Phone: +1 732 321 0852, Email: info-usa@microlit.com
www.microlit.us

★ **Microlit LATAM**

Business Place Ibirapuera, 9th Floor, Number 93,
Alameda dos Jurupis 1005 - Moema,
Indianópolis São Paulo, Brasil CEP - 04088-000,
Phone: +55 11 93269-5932, Email: info-latam@microlit.com

Follow us

