


Salinity Meters

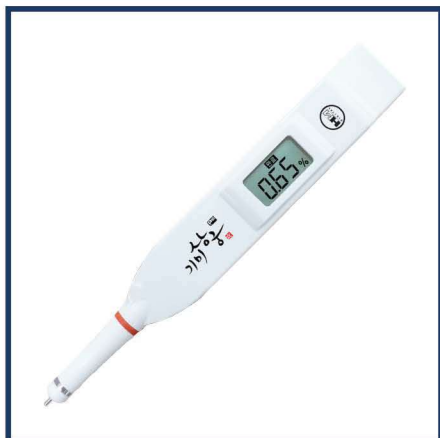

SB-2000PRO

SB-2000PRO is a very convenient salinity meter that automatically turns on by immersing the meter in a solution. With ATC function, SB-2000PRO is always accurate even at high or low temperatures. When the measurement is completed, the meter sends a vibration alert making this product the most user-friendly meter.

RANGE	0.01~10.0%
TEMP	1-99°C / 33-210°F (ATC)
ATC	YES
ACCURACY	± 0.1-0.5%
RESOLUTION	0.01% (0.01%-3.0%) 0.1% (3.0%-10.0%) Temp: 0.1°C/°F
SENSOR	Platinum
CALIBRATION	Factory calibrated
POWER	2 x AAA
DEMENSIONS	17.1 x 2.5 x 2.45 cm (7 x 1 x 1 in)
WEIGHT	66g/2.3oz (W/ BATT)

SB-500

SB-500 can be easily operated without a button, just by a light tap.

RANGE	0.1~ 5.0%
TEMP	1-99°C / 33-210°F (ATC)
ATC	YES
ACCURACY	0.1% ~ 2.0%: ± 0.1% 2.1% ~ 3.0%: ± 0.2% 3.1% ~ 5.0%: ± 0.3%
RESOLUTION	0.1%
SENSOR	Platinum
CALIBRATION	Factory calibrated
POWER	1 x 3V (CR2032)
DEMENSIONS	16.8 x 3.2 x 1.8 cm (6.6 x 1.3 x 0.4 in)
WEIGHT	66g/1.5oz (W/ BATT)

SB-1500PRO

Spoon-type salinity meter that can be used in various fields such as industrial, commercial, and at home. This meter can also read the sodium content in food, which is expressed in milligrams.

RANGE	0.01%~10.0%
TEMP	1-99°C / 33-210°F (ATC)
ATC	YES
ACCURACY	0 ~ 2%: ±0.1% 2 ~ 3%: ±0.2% 3 ~ 4%: ±0.3% 4 ~ 5%: ±0.4% 5 ~ 8%: ±0.5% 8 ~ 10%: ±0.6% Temp: ±1°C/ ±1.8°F
RESOLUTION	0.01% (0.01%-3.0%) 0.1% (3.0%-10.0%) Temp: 0.1°C/°F
SENSOR	Platinum
CALIBRATION	Digital
POWER	2 x AAA
DEMENSIONS	21.6 x 3.4 x 3.4 cm (8 x 1 x 1 in)
WEIGHT	100g/3.5oz (W/ BATT)