


# Outside Micrometers

## SERIES 103

### FEATURES

- Hammertone-green, baked-enamel-finished frame.
- Ratchet Stop or Friction Thimble for exact repetitive readings.
- With a standard except for 25mm model.

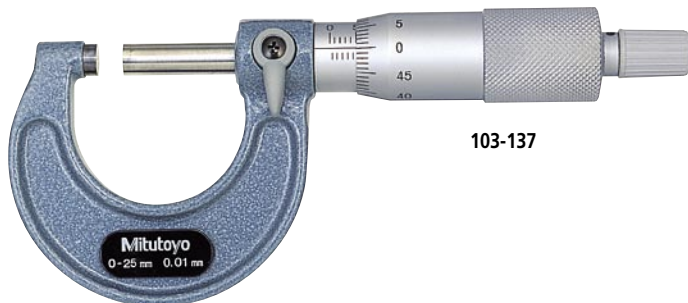

103-137



(Refer to the page 9 for details.)

### Technical Data

Accuracy: Refer to the list of specifications.  
 Graduation: 0.01mm, 0.001mm, .001" or .0001"  
 Flatness: 0.6μm for models up to 300mm  
 1μm for models over 300mm  
 Parallelism: (2+R/100)μm, R = max. range (mm)  
 \*fraction rounded down  
 Measuring faces: Carbide tipped

### SPECIFICATIONS

#### Metric With ratchet stop

Range	Order No.	Accuracy
0 - 25mm	103-137	±2μm
	103-129*	±2μm
25 - 50mm	103-138	±2μm
	103-130*	±2μm
50 - 75mm	103-139-10	±2μm
75 - 100mm	103-140-10	±3μm
100 - 125mm	103-141-10	±3μm
125 - 150mm	103-142-10	±3μm
150 - 175mm	103-143-10	±4μm
175 - 200mm	103-144-10	±4μm
200 - 225mm	103-145-10	±4μm
225 - 250mm	103-146-10	±5μm
250 - 275mm	103-147-10	±5μm
275 - 300mm	103-148-10	±5μm
300 - 325mm	103-149	±6μm
325 - 350mm	103-150	±6μm
350 - 375mm	103-151	±6μm
375 - 400mm	103-152	±7μm
400 - 425mm	103-153	±7μm
425 - 450mm	103-154	±7μm
450 - 475mm	103-155	±8μm
475 - 500mm	103-156	±8μm

(Models with a range up to 1000mm are available.)

\*0.001mm reading is obtained with vernier.

#### Inch With ratchet stop

Range	Order No.	Accuracy
0 - 1"	103-177	±.0001"
	103-131*	±.0001"
1" - 2"	103-178	±.0001"
	103-132*	±.0001"
2" - 3"	103-179	±.0001"
3" - 4"	103-180	±.00015"
4" - 5"	103-181	±.00015"
5" - 6"	103-182	±.00015"
6" - 7"	103-183	±.0002"
7" - 8"	103-184	±.0002"
8" - 9"	103-185	±.0002"
9" - 10"	103-186	±.00025"
10" - 11"	103-187	±.00025"
11" - 12"	103-188	±.00025"
12" - 13"	103-189	±.0003"
13" - 14"	103-190	±.0003"
14" - 15"	103-191	±.0003"
15" - 16"	103-192	±.00035"
16" - 17"	103-193	±.00035"
17" - 18"	103-194	±.00035"
18" - 19"	103-195	±.0004"
19" - 20"	103-196	±.0004"

(Models with a range up to 40" are available.)

\*.0001" reading is obtained with vernier.

#### Metric With friction thimble

Range	Order No.	Accuracy
0 - 25mm	103-125	±2μm
	103-133*	±2μm
25 - 50mm	103-126	±2μm

\*0.001mm reading is obtained with vernier.

#### Inch With friction thimble

Range	Order No.	Accuracy
0 - 1"	103-127	±.0001"
	103-135*	±.0001"
1" - 2"	103-128	±.0001"
	103-136*	±.0001"

\*.0001" reading is obtained with vernier.

#### Metric Micrometer set

Range	Order No.	Assortment of micrometers
0 - 75mm (3 pcs./set)	103-927-10	103-137, 103-138, 103-139-10, 2 micrometer standards
0 - 150mm (6 pcs./set)	103-913-31	102-701*, 103-138, 103-139-10, 103-140-10, 103-141-10, 103-142-10, 5 micrometer standards
150 - 300mm (6 pcs./set)	103-915-10	103-143-10, 103-144-10, 103-145-10, 103-146-10, 103-147-10, 103-148-10, 6 micrometer standards
0 - 300mm (12 pcs./set)	103-914-31	All micrometers of 103-913-31 and 103-915-10 in one set, 11 micrometer standards

\*Ratchet thimble micrometer

#### Inch Micrometer set

Range	Order No.	Assortment of micrometers
0 - 3" (3 pcs./set)	103-929	103-177, 103-178, 103-179, 2 micrometer standards
0 - 4" (4 pcs./set)	103-930	103-177, 103-178, 103-179, 103-180, 3 micrometer standards
0 - 6" (6 pcs./set)	103-904-01	101-711*, 101-106, 103-179, 103-180, 103-181, 103-182, 5 micrometer standards
6" - 12" (6 pcs./set)	103-906	103-183, 103-184, 103-185, 103-186, 103-187, 103-188, 6 micrometer standards
0 - 12" (12 pcs./set)	103-905-01	All micrometers of 103-904-01 and 103-906 in one set, 11 micrometer standards

\*Ratchet thimble micrometer